
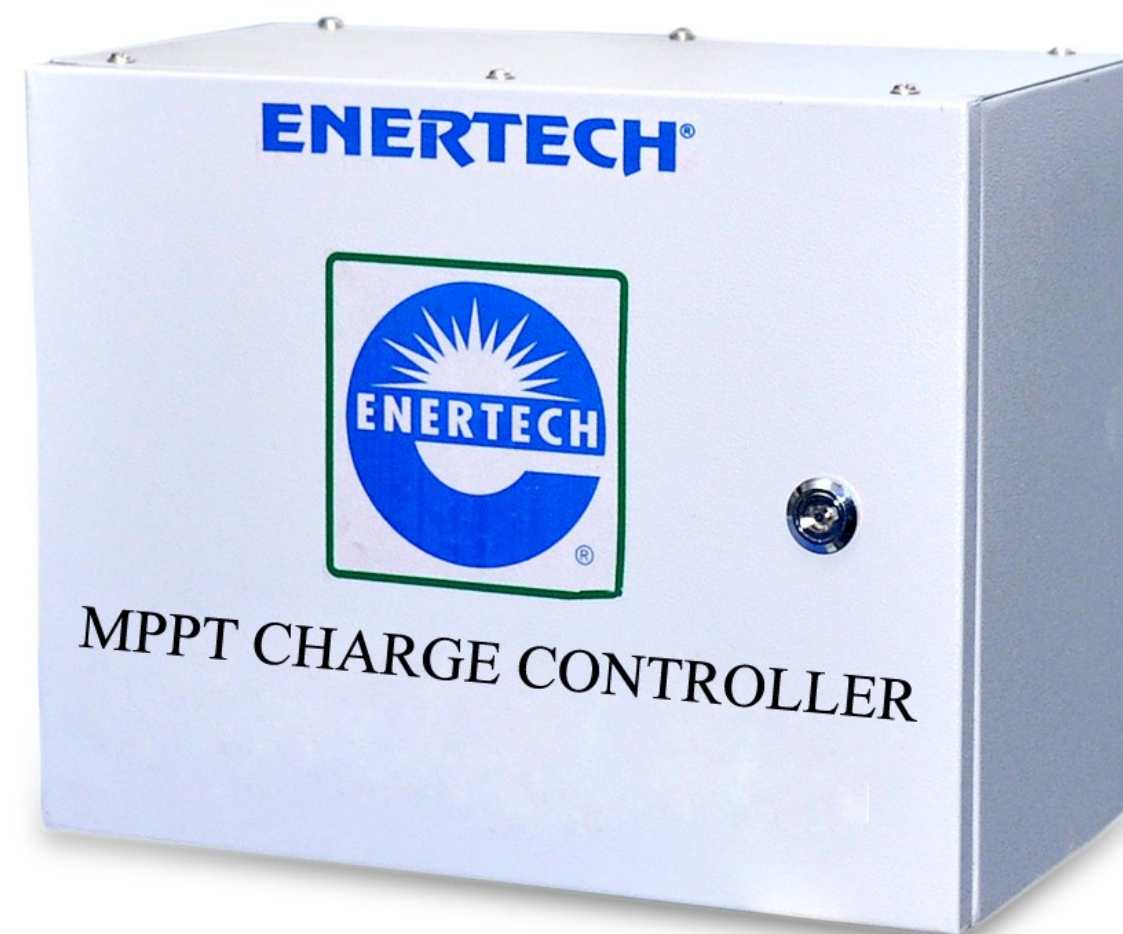


ENERTECH UPS PVT LTD

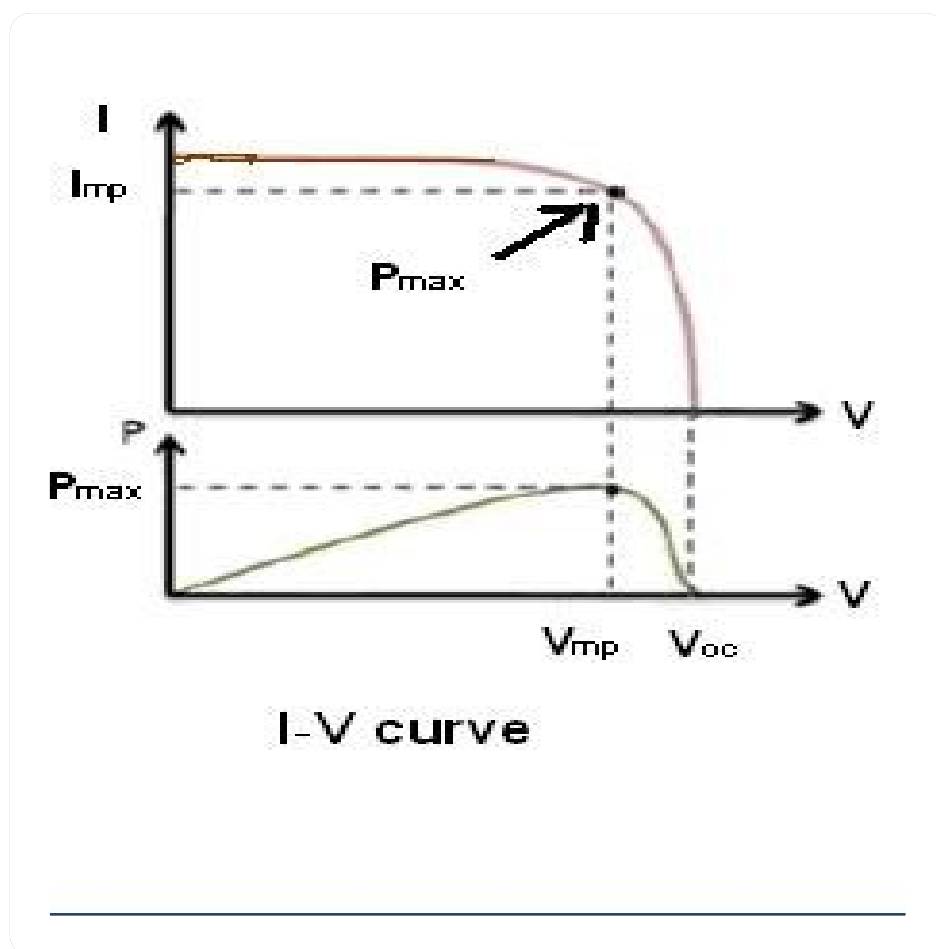

Distinctive Features:

- ✓ Advance DSP controlled
- ✓ Buck regulator wide input range
- ✓ Maximum Power Point Tracking (MPPT)
- ✓ Reverse polarities protection of PV
- ✓ Battery overcharge and over discharge protection

ENERTECH UPS PVT LTD

SPECIFICATIONS

SR No	Parameter	SPECIFICATIONS				
1	Charge Controller Type	MPPT				
2	Battery Voltage	24	48	96	120	240
3	Solar Voltage Upper limit	50	96	192	240	500
4	I/P Voltage Cut-off MPPT	>50	>90	>192	>240	>500
5	Voltage range	30V-50V	53V-96V	105V-192V	135V-240V	264V-500V
6	O/P Voltage	28V	55V	110V	138V	276V
7	O/P Current	40A/60A/80A/100A/150A/200A (customizable)				
8	Efficiency	95%				
9	Duty Cycle	CONTINUOUS				
10	Operating Temperature	0-50 Deg.Celsius				
11	Storage Temperature	-10 Deg.Celsius to 55 Deg.Celsius				
12	Humidity	95% (Non Condensing)				
13	Enclosure Protection	IP 20				
14	Cooling	Forced Air Cooling				
15	Color	BLUE / GRAY				
16	Dimensions	250mm X 350mm X 450 mm				
17	Weight	20-25 Kgs. approx.				
18	Metering	Solar Voltage, Solar Current Solar Power , Battery Voltage, Battery Current				

OTHER PRODUCTS:

Solar Conversion KIT, Solar Lift Inverter, Solar PCU for Petrol Pump, A/B ACDB DCDB ,Industrial ONLINE UPS, Industrial Battery charger, Frequency Converter, Grid Tied Inverter

**ENERTECH UPS PVT. LTD.S. No. 399/1-2, Bhare, P.O. Ghotawade,
Near Pirangut, Taluka -Mulshi, Dist. Pune - 412115
Tel: 020-20291176
Email: sales@enertechups.com
Cell : +91-9373336340**

Website: www.enertechups.com

OUR ESTEEMED CUSTOMERS



OUR APPROVALS

